

DS-3E1105P-EI/M 4 Port Fast Ethernet Smart POE Switch




- 4 × 100 Mbps PoE RJ45 ports, 1 × 100 Mbps network RJ45 port.
- IEEE 802.3at/af standard for PoE ports.
- Network topology management, alarm push, network health monitor.
- 6 KV surge protection for PoE ports.
- AF/AT camera can reach up to 300 m in extend mode.

▪ Specification

Model		DS-3E1105P-EI/M
Network Parameters	Ports	4 × 10/100 Mbps PoE port, 1 × 10/100 Mbps RJ45 port
	Port Type	RJ45 port, full duplex, MDIMDI-X adaptive
	Standard	IEEE 802.3, IEEE 802.3u, IEEE 802.3x
	High Priority Ports	Ports 1 to 2
	Forwarding Mode	Store-and-forward switching
	Working Mode	Standard mode (default), Extend mode
	MAC Address Table	2 K
	Switching Capacity	1 Gbps
	Packet Forwarding Rate	0.744 Mpps
	Internal Cache	768 Kbits
PoE Power Supply	PoE Standard	IEEE 802.3af, IEEE 802.3at
	PoE Power Pin	End-span: 1/2(-), 3/6(+) Mid-span: 4/5(+), 7/8(-) 8-pin power: 1/2(-), 3/6(+), 4/5(+), 7/8(-)
	PoE Port	PoE: Ports 1 to 4
	Max. Port Power	30 W
	PoE Power Budget	45 W
Software Function	Device Maintenance	Support remote upgrade, default parameter restoration, logs viewing, and basic network parameter configuration.
	PoE Configuration	Support PoE configuration.
	Port Configuration	Support port configuration (rate/duplex/flow control/port enabling), remote configuration, and 1-2 high-priority ports.
General	Shell	Metal material, fan-free design
	Net Weight	0.2 kg (0.4 lb)
	Gross Weight	0.7 kg (1.5 lb)
	Dimensions (W × H × D)	105.00 mm × 27.60 mm × 83.10 mm (4.13" × 1.09" × 3.27")
	Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
	Operating Humidity	5% to 95% (no condensation)
	Relative Humidity	5% to 95% (no condensation)
	Power Supply	48 VDC, 1.04 A
	Max. Power Consumption	50 W
Approval	EMC	CE-EMC (EN 55032: 2015, EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 55024: 2010 +A1: 2015); RCM (AS/NZS CISPR 32: 2015); IC (ICES-003: Issue 6, 2016)
	Safety	UL (UL 60950-1); CB (IEC 60950-1:2005 + Am 1:2009 + Am 2:2013); CE-LVD (EN 60950-1:2005 + Am 1:2009 + Am 2:2013)
	Chemistry	CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2006)

▪ Typical Application

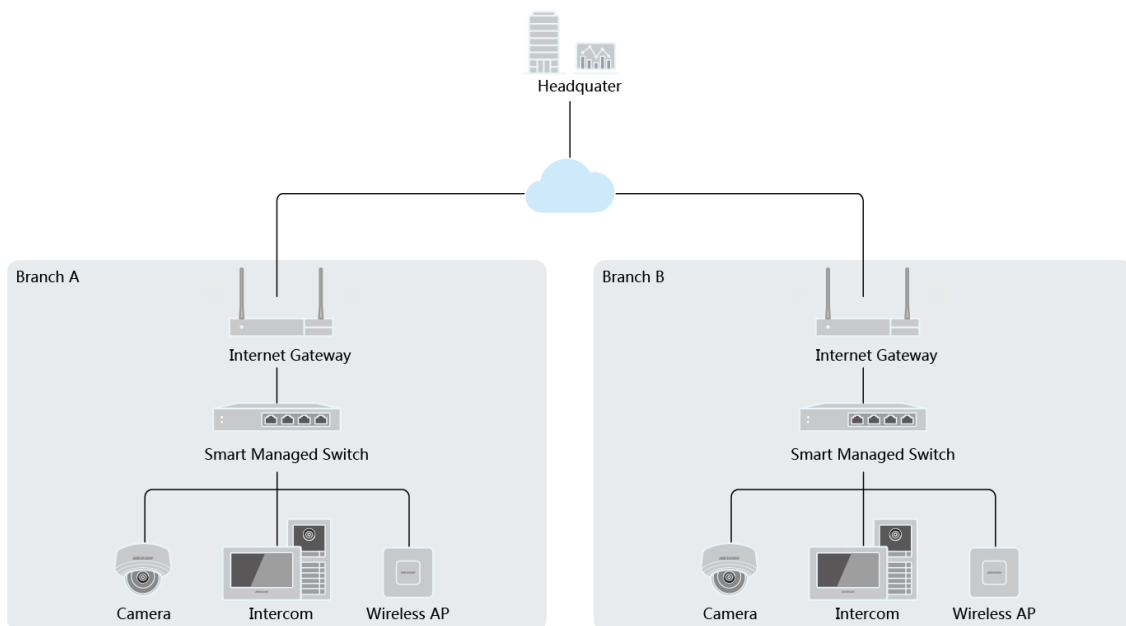

▪ Available Model

DS-3E1105P-EI/M

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq