

BULLET

AHD/TVI/CVI/CVBS Camera



Key Features

- 5MP@20fps/4MP@30fps image, high resolution, true color
- AHD/TVI/CVI/CVBS lossless video output
- CMOS progressive scan, perfectly capture the moving object
- Support OSD menu
- High speed, long distance, real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night
- Support noise reduction function
- 30m IR night view distance
- IP67 ingress protection
- Support COC
- Support 960H CVBS output


Specification

CAMERA	
Image Sensor	1 / 2.7 " Progressive Scan CMOS Sensor
Resolution	2560 x 1936
Image System	PAL / NTSC
Auto Iris	Fixed Iris
Min. illumination	0.01 lux @F1.2,AGC ON; 0 lux with IR
Lens	2.8 mm, angle of view: 104.3°
Lens Mount	M12
IR Distance	~30 m
Water-proof	IP 67
Video Output	AHD /TVI/CVI/CVBS output switch available from camera cable
Image Size	5MP (2560 x 1936)
Frame Rate	5MP @20fps / 4MP @30fps
Angle Adjustment	Any angle
Functions	
Screen Display	2 languages supported, Chinese / English
Function Control	OSD
Day & Night	Yes (ICR)
BLC & HLC	Yes
WDR	Digital WDR
Digital NR	Yes
Defect Correction	Live defective pixel correction
S / N Ratio	> 52dB (AGC off)
Electronic Shutter	1/50s ~ 1/100000s (PAL); 1/60s ~ 1/100000s (NTSC);
AGC	Yes
White Balance	ATW, AWC->SET, Manual
Advanced Image	Sharpness, saturation, brightness, etc. are adjustable
Others	
Power Supply	DC12V (±10%)
Power Consumption	< 1W
IR Consumption ON	< 4W
Working Environment	-30°C ~ 60 °C, 10% ~ 90% humidity
Dimensions (mm)	167.5 x 74.5 x 74.5 mm
Weight (net)	380g.

Design and specifications are subject to change without notice.

Sensor	Min. Illumination	WDR	Resolution	Day&Night
AWB	Sync	AGC	IR Distance	Water-proof

Dimensions

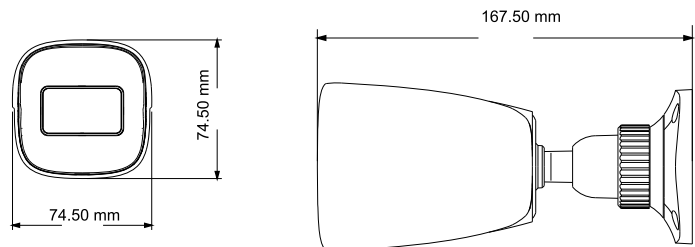

Accessories



VT-JB0103