

## DS-U02P 2 MP Web Camera



- 2 MP CMOS
- High quality imaging with 1920 × 1080 resolution
- Min. illumination: 0.1 Lux @ (F1.2, AGC ON)
- AGC for self-adaptive brightness
- Built-in microphone with clear sound
- Type A interface, supporting USB 2.0 protocol.  
Plug-and-play, no need to install driver software
- Support auto focus

## ▪ Specification


Camera	
Image Sensor	2 MP CMOS
Signal System	PAL/NTSC
Resolution	1920 (H) × 1080 (V)
Frame Rate	MJPG: 1920 × 1080 @ 30/25 fps 1280 × 960 @ 30/25 fps 1280 × 720 @ 30/25 fps 640 × 480 @ 30/25 fps 640 × 360 @ 30/25 fps YUV: 1920 × 1080 @ 5 fps 1280 × 960 @ 5 fps 1280 × 720 @ 5 fps 640 × 480 @ 30 fps 640 × 360 @ 30 fps
Min. Illumination	0.1 Lux @ (F1.2, AGC ON)
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Lens	3.6 mm fixed focal lens
Field of View	horizontal FOV: 80°, vertical FOV: 50°, diagonal FOV: 88°
Lens Mount	M8
Day & Night	24/7 Color Imaging
Angle Adjustment	pan: 360°; tilt: -15° to 15°; rotation: 0°
Cable Length	1.5 m
Lens	
Depth of Field	10 cm to ∞
Audio	
Audio Sampling Rate	16 kHz
Interface	
Video Output	USB 2.0
Audio In	Built-in mic
Operating System	Recommended systems Windows 7/8/10/11 Android 8.1 and above version Linux 4.14 and above version macOS 10.12 and above version Chrome OS
General	
Operating Conditions	-10 °C to 45 °C, Humidity: 90% or less (non-condensing)
Power Supply	DC5 V ± 5% (USB)
Consumption	Max. 1.6 W
Material	Plastic
Dimension	80.16 mm × 48.6 mm × 42.18 mm (3.16" × 1.91" × 1.66")
Weight	Approx. 93 g (0.2 lb.)

Accessory	
Packing List	Camera × 1 Quick Start Guide × 1

▪ **Available Model**

DS-U02P

▪ **Dimension**

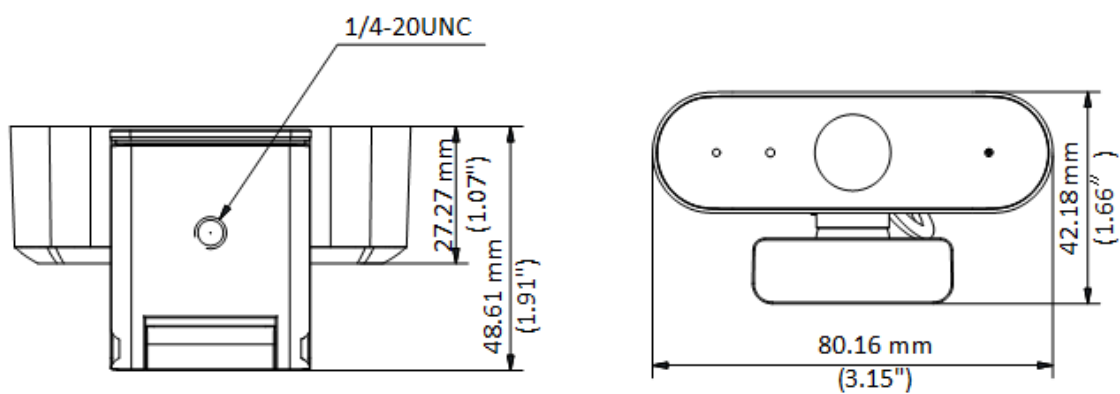

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

