

RG-RAP6260(G)

Reyee Wi-Fi 6 AX1800 Outdoor Omni-directional Access Point

DATASHEET



Highlights

- 'UFO' design, a perfect blend of Wi-Fi 6 technology and artwork
- IP68 protection, rock-solid in harsh environments
- Omni-directional coverage with long range
- Easily add extra outdoor Wi-Fi with Reyee Mesh
- Rack-separated mounting design, easily installation on high

Highlight Features

Reyee New Generation Outdoor WiFi 6 Access Point

RG-RAP6260(G)



WiFi 6

802.11AX
Standard



Gigabit
SFP Port

100

Recommended
Concurrent Users

IP68

Water/Dust
Proof

6000_v

Surge
Protection

V0

Highest
Flame-retardant Level

-40°C to 65°C

Operating
Temperature



Angle Flexible
Adjustment



L3 Roaming



Self-Organizing
Network



Mobile APP
Management




Remote
Maintenance

Highlight Features

Move Wi-Fi 6 to Outdoors

RG-RAP6260(G) Compliant with the 802.11AX Wi-Fi 6 Standard

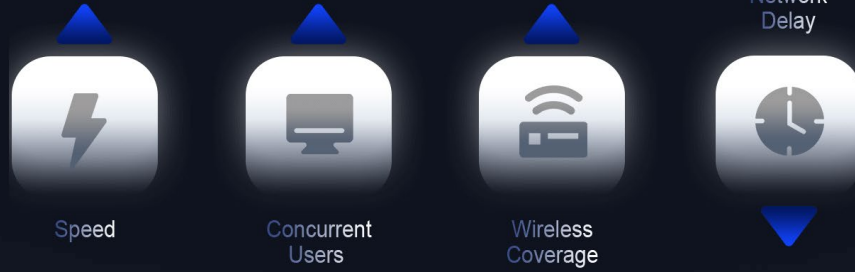

WiFi 6

Allow 100 Users Access Concurrently to Internet

OFDMA

MU-MIMO



Highlight Features

Outdoor Wireless Can Also be Faster

AX1800 standard, 1200Mbps speed on 5GHz
Even at Outdoors, the Wi-Fi Speed can also be better



Square



Scenic spot



Station



School




Market



Construction Site

Support Extra-Distance Access Point Deployment

With gigabit SFP port, the device supports up to 20km
transmission from datacenter with single mode fiber

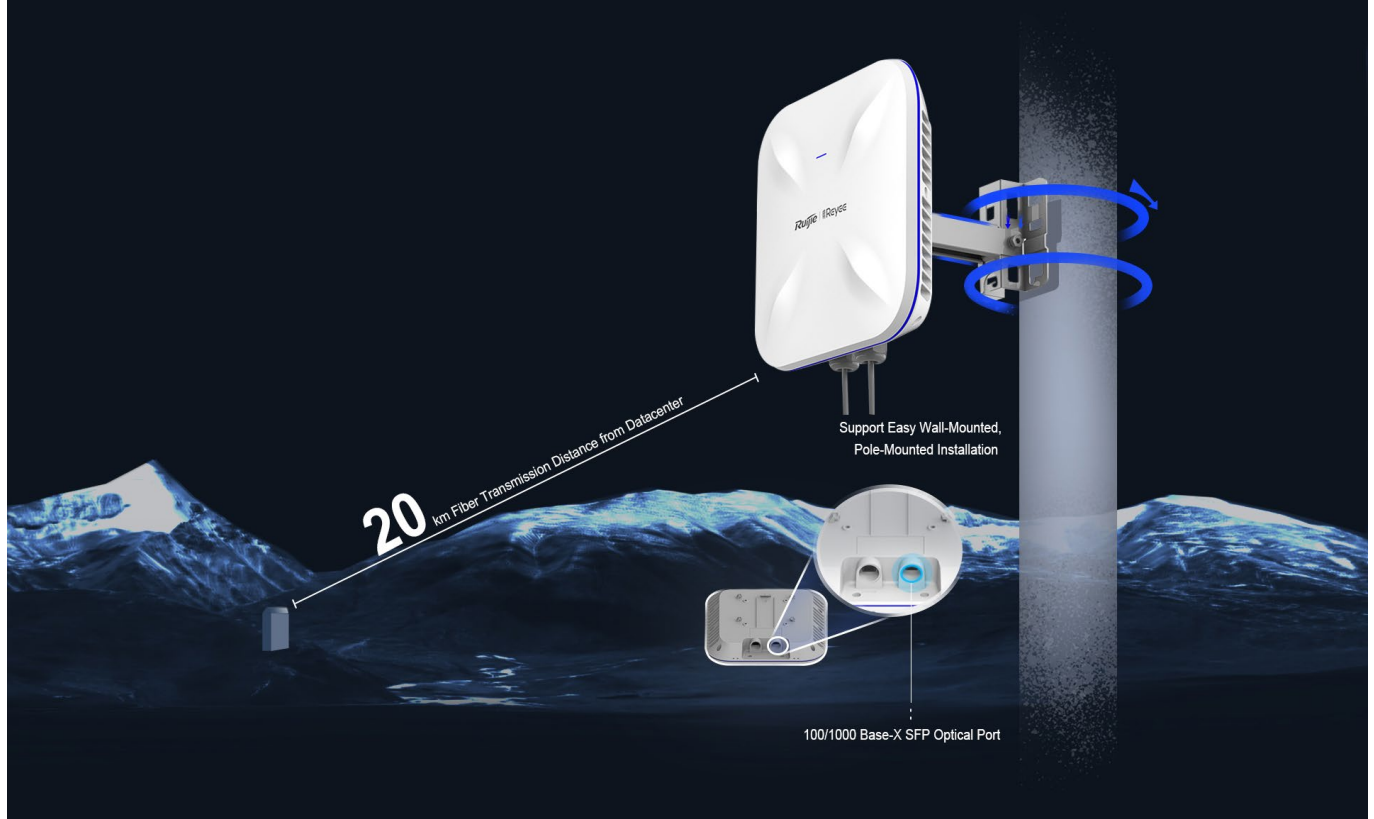

Highlight Features


No Worries About Harsh Environment

Industrial-Level Design, More Reliable


IP68 Level
Protection




Surge Protection
6000V



Flame-retardant
V0 Highest Level





Wide Temperature
-40°C ~ 65°C



Signal Interference Filtered, Transmission More Stabilized

Equipped with high quality FBAR filter, which can effectively suppress and filter the interference from carrier cell base station and Bluetooth devices etc.


With high quality antenna, the receiving sensitivity is further optimized, thereby improves transmission quality.



Highlight Features

Layer 3 Roaming, Ensure Service Always Online

With layer 3 networking, when a user accesses the Internet across the layer 3 network, the terminal can perform a fast and smooth roaming switchover, ensuring service continuity

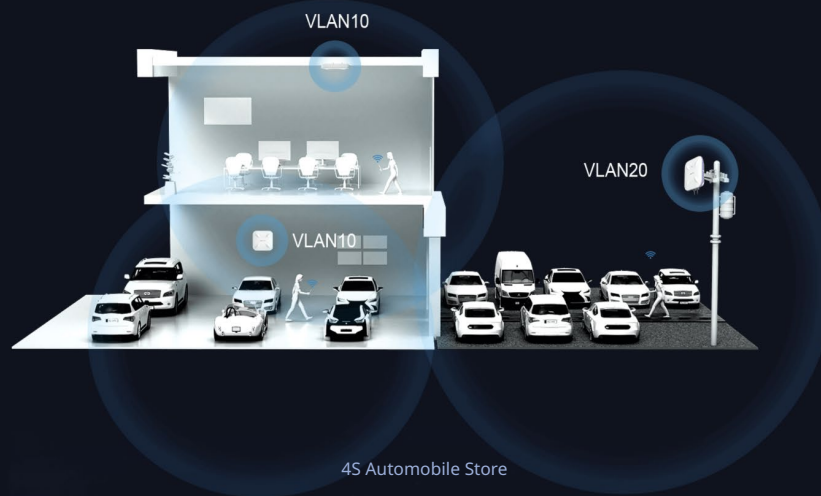

Self-Organizing Network Gets All Devices Online Easily

Too many APs? Gateway, switch configuration too complex? Don't worry, SON can help you easily complete the whole network equipment setup.



Highlight Features

**From Setup, Debug, Delivery, to Maintenance
Whole Network Cloud Management**

RG-RAP6260(G)



Specifications

Basic Feature

Wi-Fi Standards	Wi-Fi 6 (IEEE 802.11ax) Wi-Fi 5 (IEEE 802.11ac Wave2) Wi-Fi 4(IEEE 802.11n)
RF Design	2.4 GHz, 2 × 2, MU-MIMO 5 GHz, 2 × 2, MU-MIMO
Max. Wi-Fi Speed	2.4 GHz: 574 Mbps 5 GHz: 1201 Mbps
Antenna	4
Antenna Type	Built-in Omnidirectional
Antenna Gain	2.4 GHz: 4 dBi 5 GHz: 6 dBi
Transmit Power	Frequency bands using and the max EIRP: Note: Country specific restrictions apply European Union & United Kingdom 2400-2483.5 MHz, EIRP ≤ 20 dBm 5470-5725 MHz, EIRP ≤ 30 dBm United States: 2400-2483.5 MHz, max output power ≤ 30 dBm & EIRP ≤ 36 dBm 5150-5250 MHz, max output power ≤ 30 dBm & EIRP ≤ 36 dBm 5250-5350 MHz, max output power < 24 dBm & EIRP ≤ 30 dBm 5470-5725 MHz, max output power < 24 dBm & EIRP ≤ 30 dBm 5725-5825 MHz, max output power ≤ 30 dBm & EIRP ≤ 36 dBm Myanmar : 2400-2483.5 MHz, EIRP ≤ 23 dBm 5725-5825 MHz, EIRP ≤ 30 dBm Thailand: 2.4 GHz to 2.4835 GHz: 20 dBm 5.470 GHz to 5.725 GHz: 30 dBm 5.725 GHz to 5.825 GHz: 30 dBm Indonesia: 2400-2483.5 MHz, EIRP ≤ 36 dBm 5725-5825 MHz, EIRP ≤ 36 dBm Egypt: 2400-2483.5 MHz, EIRP ≤ 20 dBm 5150-5350 MHz, EIRP ≤ 23 dBm"
Fixed Ports	1 × 10/100/1000 Base-T 1 x SFP
Max. Clients	512

Specifications

Basic Feature

Recommended Clients	100
---------------------	-----

Max. SSIDs	8
------------	---

Software Feature

WLAN Basic Features

SSID Hiding	✓
-------------	---

Power Adjustment	✓
------------------	---

Roaming	Layer 2 Roaming Layer 3 Roaming 802.11k/v/r
---------	---

OFDMA	✓
-------	---

Target wake time (TWT)*	✓
-------------------------	---

WMM	✓
-----	---

Radar Signal Detection and Frequency Hopping	✓
--	---

WLAN Security

Security Mode	WPA-PSK, WPA2-PSK, WPA/WPA2-PSK;
---------------	----------------------------------

Blacklist and Whitelist	✓
-------------------------	---

Enhanced User Experience

Wi-Fi Optimization	✓
--------------------	---

Automatic RF adjustment via the platform	✓
--	---

User Isolation	Layer 2 User Isolation
----------------	------------------------

STA limit	✓
-----------	---

Removing Low-RSSI STAs	✓
------------------------	---

Configuring STAs' RSSI Threshold	✓
----------------------------------	---

Specifications

Software Feature	
Average Speed Threshold	✓
Adjusting Sending Rate of Beacon and Probe Response	✓
Syslog Recording Why Users Lose Connection	✓
Auto Channel and Power Adjustment on Cloud	✓
RSSI Threshold for STA Access	✓
Quick channel adjustment (auto channel selection)	✓
Networks	
Network Access Mode	DHCP Client
VLAN	✓
System	
Cloud Management	✓
App Management	✓
App Upgrade	✓
App Restart	✓
Default Access/Password	10.44.77.254 The factory status password: admin
Scheduled Restart	✓
Local Upgrade	✓
Online Upgrade	✓
Factory Reset	✓

Specifications

WLAN Features

Frequency Bandwidth
2.4 GHz: 20/40 MHz
5 GHz: 20/40/80 MHz

Recommended Wi-Fi Coverage Radius
2.4 GHz: 50m, 5 GHz: 150m

Max. Wi-Fi Coverage Radius
2.4 GHz: 100m, 5 GHz: 300m

Operation Frequency Bands
802.11b/g/n/ax: 2.400 GHz to 2.483 GHz
802.11a/n/ac: 5.150 GHz to 5.350 GHz
802.11a/n/ac/ax: 5.470 GHz to 5.725 GHz , 5.725 GHz to 5.850 GHz
country-specific restrictions apply

Receive Sensitivity

Physical

LED Indicator
3 × System LED Indicator

Buttons
1 × Reset Button

Dimensions (W x D x H)
200 mm × 220 mm × 166 mm (Without Mounting Bracket)

Weight
1.2 kg (Without Mounting Bracket)

Power

Power Supplies
IEEE 802.3af/at PoE

Power Consumption
≤ 17W

DC Port Dimensions
Outer Diameter: 5.5 mm Inner Diameter: 2.1 mm Length: 10 mm

Environmental

Operating Temperature
-40°C to 65°C

Storage Temperature
-40°C to 85°C

Operating Humidity
0% to 100% (Noncondensing)

Storage Humidity
0% to 100% (Noncondensing)

IP(Ingress Protection)
IP68

Port Surge
4 kV

MTBF
>250000H

Ruijie | Rcycc

 **Redefine your easy network**

Copyright ©2000-2023 Ruijie Networks Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd.
Building 19, Juyuanzhou Industrial Park, No.618 Jinshan
Road, Cangshan District, Fuzhou, Fujian, China
Website: <https://www.ruijienetworks.com>